



机构特性 Mekanizma Özellikleri						
名称 İsim	机构代号 Model	工作速度 m/min Çalışma Hızları		起重量 t Kaldırma Ağırlığı	最大绕绳量 Max Halat Uzunluğu	电动机 kW Motor
起升 Kaldırma	75LVF30R 	双绳 2 fall	0-43	6	570m >570m★	55
			0-64.5	3.9		
			0-86	2.1		
		四绳 4 fall	0-21.5	12		
			0-32.25	7.8		
			0-43	4.2		
	102LVF30FW 	双绳 2 fall	0-50	6	1000m >1000m★	75
			0-75	3.9		
			0-100	2.1		
		四绳 4 fall	0-25	12		
			0-37.5	7.8		
			0-50	4.2		
变幅 Trolleying	X96K 	10-20-40				堵转力矩 95N.m
	6DVFK 	0-40				5
回转 Çevirme	RCV120C 	0-0.7 r/min				堵转力矩 2×120N.m
	16RVF 	0-0.7 r/min				2×5.5
行走 Travel	22TVF 	0-25				4×4
	RT443 	0-12.5-25				4×1.7/3.4
电源 Güç Kaynağı	380V 50Hz 440V 60Hz	75LVF:100kVA 76LVF:100kVA		102LVF:120kVA 70RCS:100kVA		
★ 根据用户特殊要求提供 Müşterinin özel gereksinimlerine göre tedarik edilecektir.						

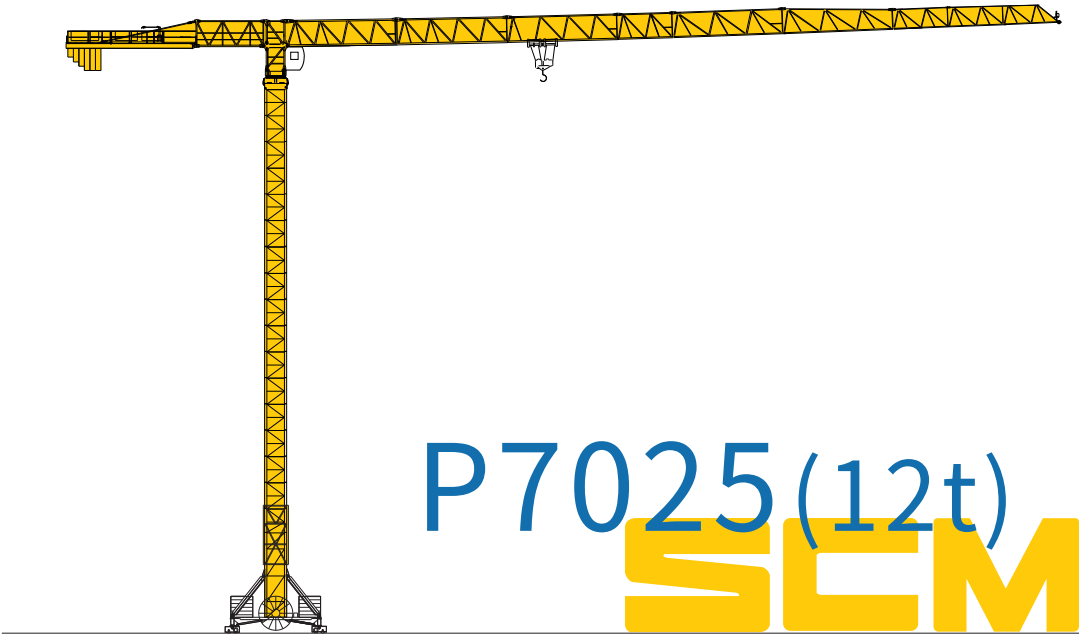


外形尺寸 Outline Dimensions

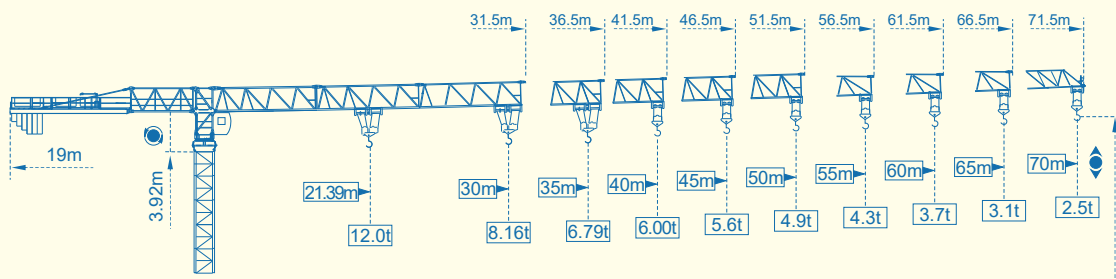

塔身截面 Mast

2m × 2m

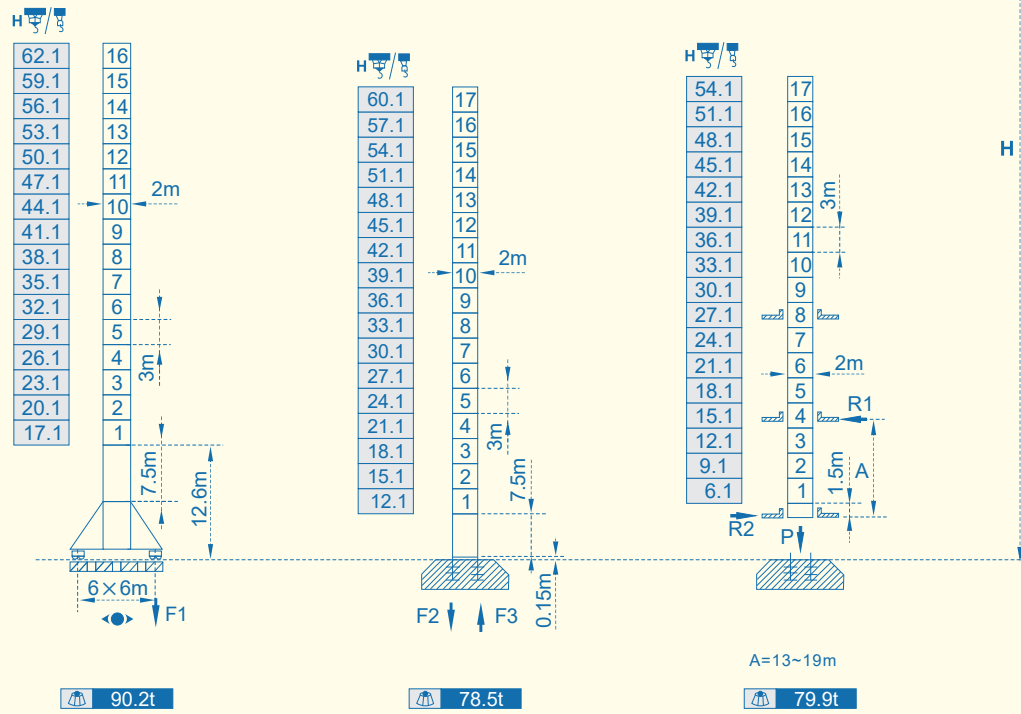

载荷特性 Load Diagrams

