



机构特性 Specifications Mechanisms					
名称 İsim	机构代号 Model	工作速度 m/min Çalışma Hızları		起重量 t Kaldırma Ağırlığı	最大绕绳量 Max. Halat Uzunluğu
起升 Kaldırma	50LVF25P ⬆️⬆️	双绳 2 fall	0-37.5	5	600m >600m★
			0-75	2.5	
		四绳 4 fall	0-18.75	10	
			0-37.5	5	
	75LVF25RE ⬆️⬆️	双绳 2 fall	0-50	5	800m >800m★
			0-75	3.25	
			0-100	1.75	
		四绳 4 fall	0-25	10	
			0-37.5	6.5	
			0-50	3.5	
变幅 Trolleying	X96L ⬅️➡️	15-38-58			堵转力矩 95N.m
	6DVFL ⬅️➡️	0-58			5
回转 Çevirme	RCV95 ⬆️	0-0.7r/min			堵转力矩 2×95N.m
	9RVF ⬆️	0-0.7r/min			2×5.5
行走 Travel	22TVF ⬅️➡️	0-25			4×4
	RT443 ⬅️➡️	0-12.5-25			4×1.7/3.4
电源 Güç Kaynağı	380V 50Hz 440V 60Hz	100kVA			

★ 根据用户特殊要求提供
Müşterinin özel gereksinimlerine göre tedarik edilecektir.

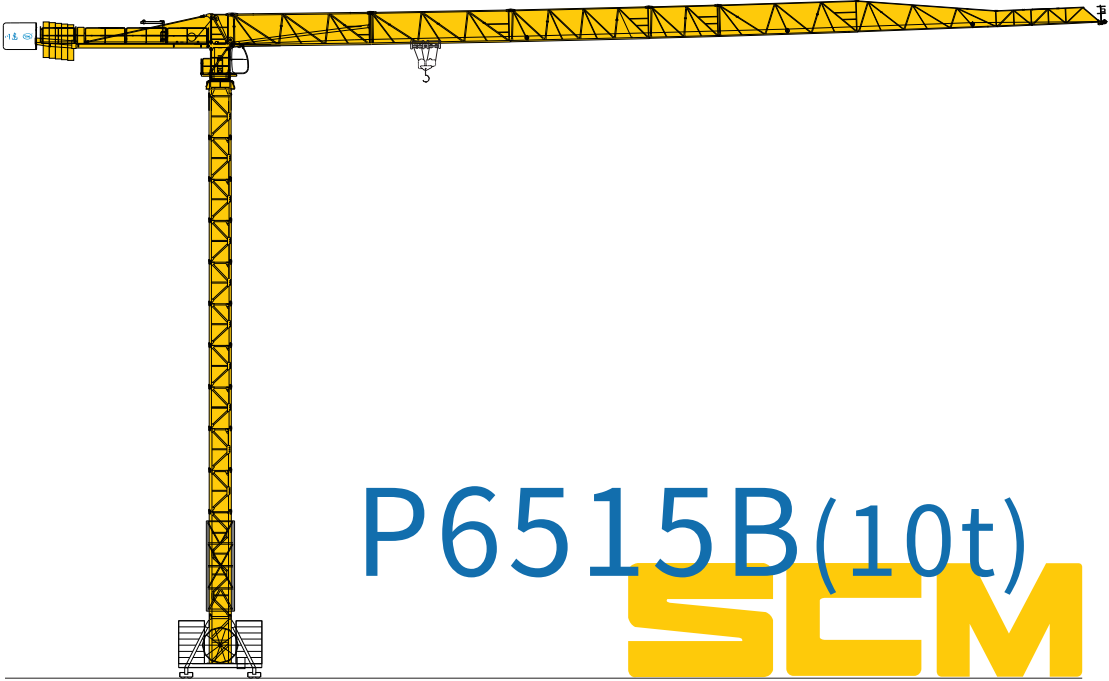


外形尺寸 Outline Dimensions

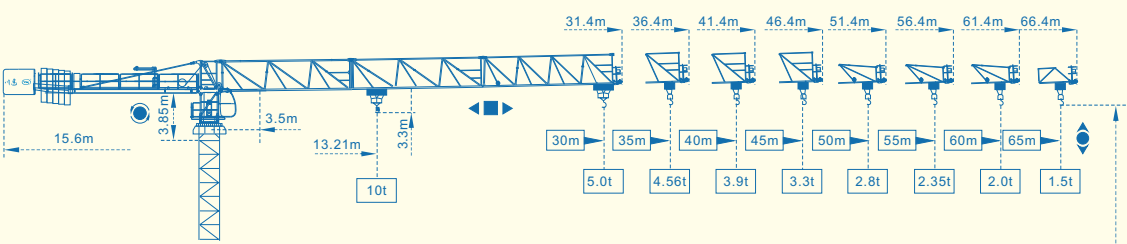

塔身截面 Mast

1.6m × 1.6m

2m × 2m

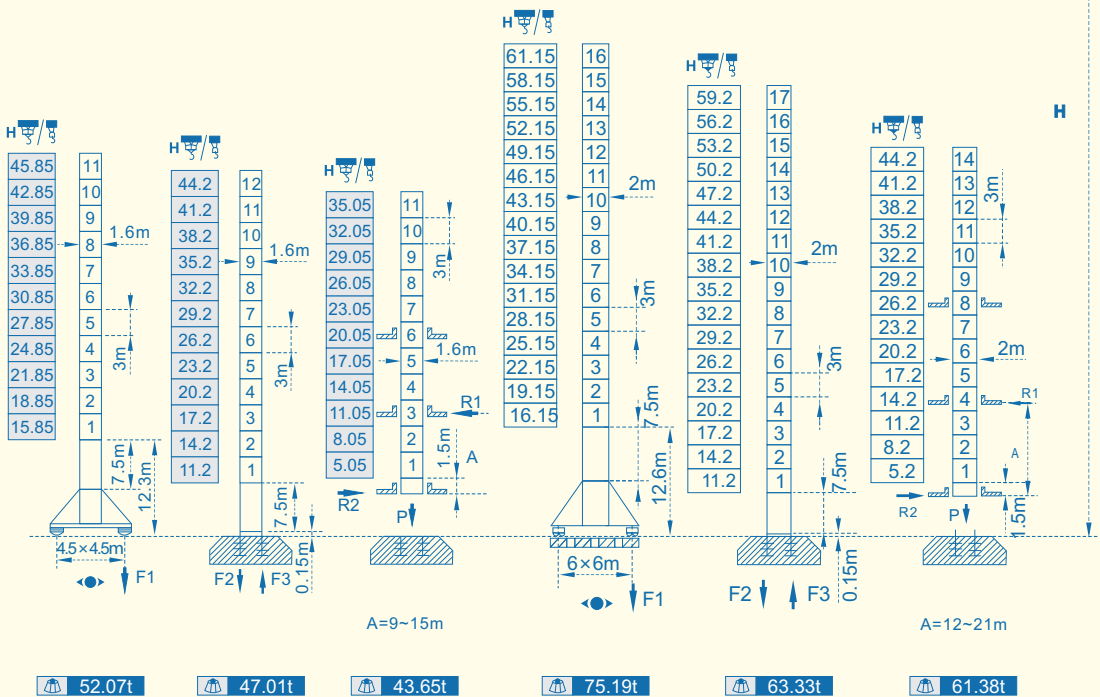

载荷特性 Load Diagrams

臂 Jib

65m

3.5 →	13.21	15	17	20	22	23.44	25	27	30	32	35	37	40	42	45	47	50	52	55	57	60	62	65 m
	10.0	8.60	7.40	6.08	5.41	5.0	4.61	4.18	3.65	3.35	2.97	2.75	2.46	2.30	2.07	1.94	1.76	1.65	1.51	1.42	1.30	1.22	1.12 t
4.3 →							24.96	27	30	32	35	37	40	42	45	47	50	52	55	57	60	62	65 m
							5.0	4.56	4.03	3.73	3.35	3.13	2.84	2.68	2.45	2.32	2.14	2.03	1.89	1.80	1.68	1.60	1.50 t

60m

3.5 →	14.94	17	20	22	25	26.62	30	32	35	37	40	42	45	47	50	52	55	57	60 m
	10.0	8.59	7.08	6.31	5.40	5.0	4.30	3.96	3.53	3.28	2.95	2.76	2.50	2.35	2.15	2.03	1.86	1.76	1.62 t
4.3 →	28.36 30 32 35 37 40 42 45 47 50 52 55 57 60 m																		
						5.0	4.68	4.34	3.91	3.66	3.33	3.14	2.88	2.73	2.53	2.41	2.24	2.14	2.0 t

55m

3.5 →	15.48	17	20	22	25	27.61	30	32	35	37	40	42	45	47	50	52	55	m
10.0	8.96	7.39	6.60	5.65	5.0	4.51	4.16	3.70	3.44	3.10	2.90	2.64	2.48	2.27	2.14	1.97	t	
4.3 →							29.42	32	35	37	40	42	45	47	50	52	55	m
5.0							5.0	4.53	4.08	3.82	3.48	3.28	3.02	2.86	2.65	2.52	2.35	t

50m

3.5 →	16.15	20	22	25	27	28.84	30	32	35	37	40	42	45	47	50	m
10.0	7.78	6.94	5.96	5.42	5.0	4.76	4.39	3.92	3.65	3.29	3.08	2.81	2.64	2.42		t
4.3 →								30.73	35	37	40	42	45	47	50	m
5.0							5.0	4.30	4.03	3.67	3.46	3.19	3.02	2.80		t

45m

3.5 →	16.61	20	22	25	27	29.68	32	35	37	40	42	45	m
	10.0	8.04	7.18	6.16	5.62	5.0	4.55	4.07	3.79	3.42	3.21	2.92	t
4.3 →								31.63	37	40	42	45	m
								5.0	4.17	3.80	3.58	3.30	t

40m

3.5 →	16.97	20	22	25	27	30.34	32	35	37	40	m
10.0	8.25	7.37	6.33	5.77	5.0	4.68	4.18	3.89	3.52		t
4.3 →							32.33	35	37	40	m
5.0							5.0	4.56	4.27	3.90	t

35m

3.5 →	16.97	20	22	25	27	30.34	32	35	m
10.0	8.25	7.37	6.33	5.77	5.0	4.68	4.18	t	
4.3 →							32.33	35	m
5.0							5.0	4.56	t

30m

3.5 →	16.97	20	22	25	27	30.34	m
	10.0	8.25	7.37	6.33	5.77	5.0	t
4.3 →						30	m
						5.0	t